



Battery Powered Photoelectric Smoke Alarm

• Model PE9 • Part Number PE9E

Test Button

Tests unit's electronic circuitry, horn and battery function

Red LED

Flashes every 30-40 seconds to indicate that the smoke alarm is operating



Description

The Kidde PE9E is a battery operated smoke alarm, equipped with a photoelectric sensor, designed to alert you and your family to the dangers of smoke and fire. The PE9E includes a 9V, protecting you even during a power failure. This unit is UL Listed and offers a 5-year limited warranty.

Consumer Benefits

The Kidde PE9E photoelectric smoke alarm is battery operated protecting you and your family even during power outages. This unit does not require any wiring and can be installed in minutes. The PE9E is equipped with a test button that allows you to test the alarm's electronic circuitry, horn and battery function.

Features and Benefits

- **Test Button** – Tests unit's electronic circuitry, horn and battery function.
- **Battery Operated (9V Battery Included)** – Protects even during a power outage.
- **Low Battery Indicator** – Smoke alarm will chirp in the event of a low battery.
- **Tamper Resist Locking Pin** – Helps deter alarm tampering or theft.



Architectural and Engineering Specifications

The smoke alarm shall be Kidde Model PE9 or approved equal. It shall be powered by a 9V battery. The unit shall incorporate an photoelectric sensor with nominal sensitivity of 2.06%/ft. The temperature operation range shall be between 40°F and 100°F (4°C and 38°C) and the humidity operation range shall be 5% - 95% relative humidity.

The unit shall provide optional tamper resistance that helps deter removal of the unit from the wall or ceiling. The alarm shall include a test button that will electronically simulate the presence of smoke and cause the unit to go into alarm. This sequence tests the unit's electronics, battery and horn to ensure proper operation. The unit shall include a piezoelectric horn that is rated at 85dB at 10 feet. The unit shall also include a low battery warning utilizing a brief alarm chirp every 30-40 seconds along brief flashed from the safety light for a minimum of seven (7) days.

The unit shall incorporate one red LED to indicate the alarm's current status and mode of operation. The red LED will indicate one of two conditions:


Standby Condition: The red LED will flash every 30-40 seconds to indicate that the smoke alarm is operating properly.

Alarm Condition: When the alarm senses products of combustion and goes into alarm, the red LED will flash rapidly (one flash per second). The rapid flashing LED and pulsating alarm will continue until the air is cleared.

The unit shall at a minimum meet the requirements of UL217, NFPA72, (chapter 11 2002 edition), The State of California Fire Marshall, NFPA 101 (One and two family dwellings) Federal Housing Authority (FHA), Housing and Urban Development (HUD). It shall also include a 5-year manufacturer's limited warranty.

Technical Specifications

UPC:	0-25417-16509-8
Power Source:	9V Battery (included)
Audio Alarm:	85dB at 10ft
Temperature Range:	40°F to 100°F (4°C to 38°C)
Humidity Range:	5%-95% relative humidity (RH)
Sensor:	Photoelectric
Size:	5" in diameter x 1.5" depth
Weight:	.8lbs
Interconnects:	No
LED:	Red, normal operation
Warranty:	5 year limited

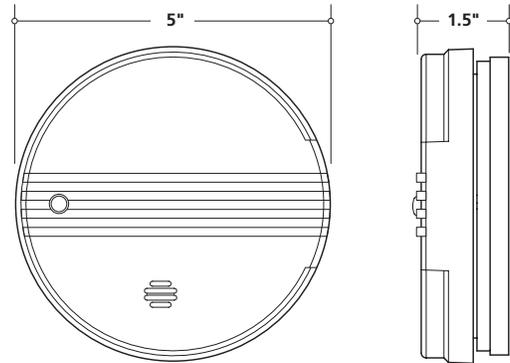


Ordering Information

Gift Box UPC: 0-25417-16509-8

Part Number	I 2 of 5	Pack Quantity	Dimensions (w x d x h inches)	Weight	Case/Skid	Layers/Skid	Skid Weight
PE9**	N/A	Individual	5.2 x 1.5 x 5.2	1lb	N/A	N/A	N/A
PE9E	20025417165092	Master Pack (12 units)	10.75 x 10.75x 5.5	12lbs	128	16	1635lbs

**Not for sale by individual unit

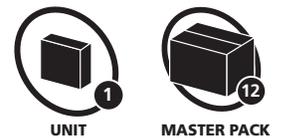

1394 South Third Street, Mebane NC 27302
1-800-880-6788 • www.kiddeus.com

Distributed by: